

LED IP65 LOW-PROFILE FIRE-RATED DOWNLIGHTS**PRODUCT DESCRIPTION**

LED fire-rated downlights. Supplied without a bezel, with a choice of 3 bezels available to be purchased and fitted as separate items.

KEY FEATURES

- 30, 60, 90 minutes fire-rated and acoustic rated
 - Die-cast aluminium heat sink
 - Detachable bezels available in white, chrome & satin chrome finishes. Bezels are not supplied with the fitting, but have to be ordered separately.
 - Loop-in/loop-out terminals with push-release terminals for easy installation with no screwdriver required
 - Terminals suitable for T&E or flex
 - Terminal cover and cable clamp push-fit into place - no screws required
 - Wide beam angles make these fittings suitable for many general lighting applications. 3W & 6W - 40°, 9W - 60°.
 - Low-profile and with flexible driver housing make this fitting suitable for many confined spaces
-


TECHNICAL DETAILS


Available in three wattages, as listed:

- 3W (nom.), 5W (act.), 404 lumens, 81 l.lm/c.W
- 6W (nom.), 7W (act.), 578 lumens, 83 l.lm/c.W
- 9W (nom.), 9W (act.), 770 lumens, 86 l.lm/c.W
- CRI >80
- CCT - choice of 3000K or 5000K
- Class II, but there is provision for PE to loop in & out.

Part number	Description
LEDFRDL/3W/DIM/830	404LM 3W FRDL 830 38 DEG IP65 DIM
LEDFRDL/3W/DIM/850	404LM 3W FRDL 850 38 DEG IP65 DIM
LEDFRDL/6W/DIM/830	578LM 6W FRDL 830 38 DEG IP65 DIM
LEDFRDL/6W/DIM/850	578LM 6W FRDL 850 38 DEG IP65 DIM
LEDFRDL/9W/DIM/830	771LM 9W FRDL 830 60 DEG IP65 DIM
LEDFRDL/9W/DIM/850	771LM 9W FRDL 850 60 DEG IP65 DIM
LEDFRDL/BEZEL/WH	3/6/9W FRDL BEZEL WHITE
LEDFRDL/BEZEL/CH	3/6/9W FRDL BEZEL CHROME
LEDFRDL/BEZEL/BN/SS	3/6/9W FRDL BEZEL BRUSHED NICKEL / STAINLESS STEEL

PHOTOMETRIC DATA

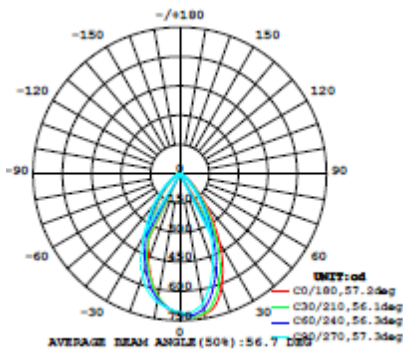

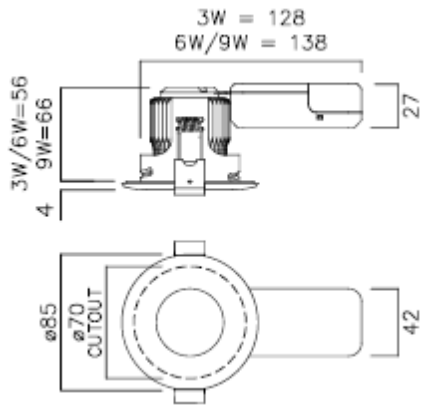

Date completed by manufacturer: 29 September 2016