

DIRECT/INDIRECT LED PANEL**PRODUCT DESCRIPTION**

LED 600 x 600 direct/indirect fitting in standard mains, emergency and dimming versions. With its attractive and distinctive design this product presents customers with the opportunity to install something other than a standard flat panel.

KEY FEATURES


- For recessed installation in 15-24mm exposed T ceilings
- Back-lit design
- Opal polycarbonate diffusers in a steel body
- Supplied complete with driver
- Available in single-diffuser and twin-diffuser versions

TECHNICAL DETAILS


- Single diffuser: 40W (actual), 3,380 lumens, 85 luminaire lumens/circuit watt
 - Twin diffuser: 40W (actual), 3,490 lumens, 87 luminaire lumens/circuit watt
 - CRI >80
 - CCT 5000K
 - Dimming versions available as listed below
 - Class I
 - 5 year warranty
-

Part number	Description
LMOD3/66/850	595x595 3380LM 40W LED 1 DIFF PANEL 850
LMOD3/66/850/E3	595x595 3380LM 40W LED 1 DIFF PANEL 850 E3
LMOD3/66/850/DIM	595x595 3380LM 40W LED 1 DIFF PANEL 850 DIM
LMOD3/66/850/E3/DIM	595x595 3380LM 40W LED 1 DIFF PANEL 850 DIME3
LMOD4/66/850	595x595 3490LM 40W LED 2 DIFF PANEL 850
LMOD4/66/850/E3	595x595 3490LM 40W LED 2 DIFF PANEL 850 E3
LMOD4/66/850/DIM	595x595 3490LM 40W LED 2 DIFF PANEL 850 DIM
LMOD4/66/850/E3/DIM	595x595 3490LM 40W LED 2 DIFF PANEL 850 DIME3

PHOTOMETRIC DATA

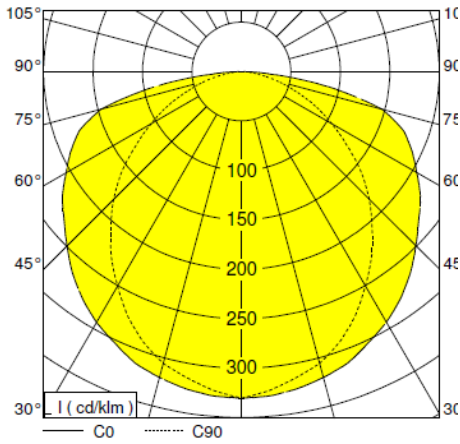

Single diffuser

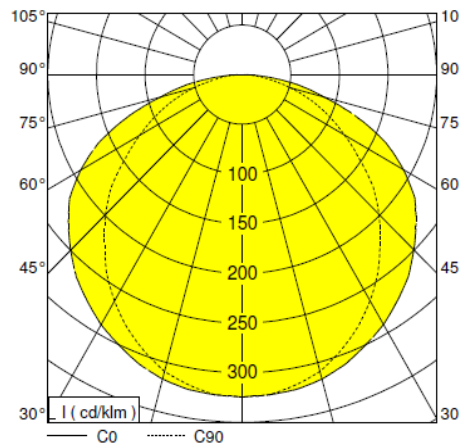

Twin diffuser

SINGLE DIFFUSER VERSION

TWIN DIFFUSER VERSION

