

**HEAVY-DUTY LED SURFACE FITTING IDEAL FOR SCHOOLS****PRODUCT DESCRIPTION**

LED surface fitting, 5' in length, in a very robust steel and polycarbonate housing. Ideally suited to use in schools, colleges and any space where resistance to knocks is required.

**KEY FEATURES**



- Steel base and gear tray with polycarbonate end caps and diffuser.
  - End caps retained with stainless steel screws, gear tray retained on snap-fit brackets and steel safety wires
  - Available in emergency (E3) and dimming (DD) versions, as listed
  - Driver included
  - IP40
  - IK10 rated for resistance to impact
-

**TECHNICAL DETAILS**

- 54W, 4,665 lumens, 85 luminaire lumens per circuit watt
- CRI >80
- CCT 5000K
- Class I
- 5 year warranty

Part number	Description
LEDSURF/54/850	5FT 4665LM 54W LED SURFACE LINEAR 850
LEDSURF/54/850/E3	5FT 4665LM 54W LED SURFACE LINEAR 850 E3
LEDSURF/54/850/DIM	5FT 4665LM 54W LED SURFACE LINEAR 850 DD
LEDSURF/54/850/E3/DIM	5FT 4665LM 54W LED SURFACE LINEAR 850 DD E3

**PHOTOMETRIC DATA**

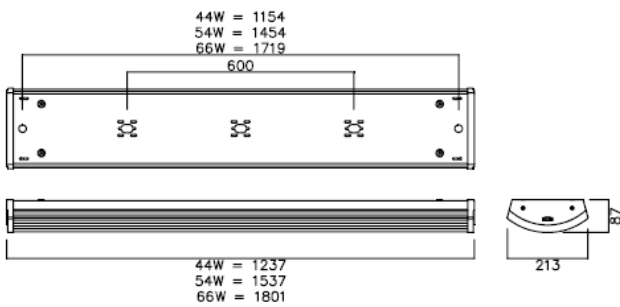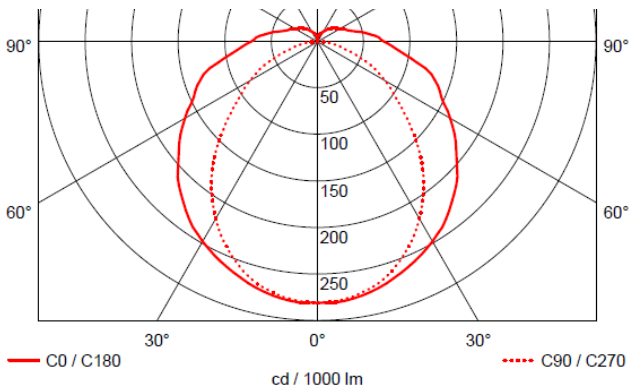

Date completed by manufacturer: 29 September 2016